

# Modular wall as interior wall



Patent

## Description of the components:

- Galvanized trapezoidal sheets / painted columns
- Preassembled frames – therefore you save a lot of time during the assembly.
- The metal sheets can be easily screwed together.
- All screws and connecting parts will be delivered
- Thickness : 1,5 mm

## Assembly:


- Assembly of the parts will be easy thanks to the drawings and pictures in the assembly- and operation manual
- Position plan and parts list will be delivered with the parts

## Advantages:

- Can be combined and adapted to the existing building
- No concrete work is obligatory. It is only recommended for easy cleaning
- Stability and durability of the installation
- Easy cleaning
- Sealing part

## Different versions:

- With or without bracing - (will be specified by ordering)

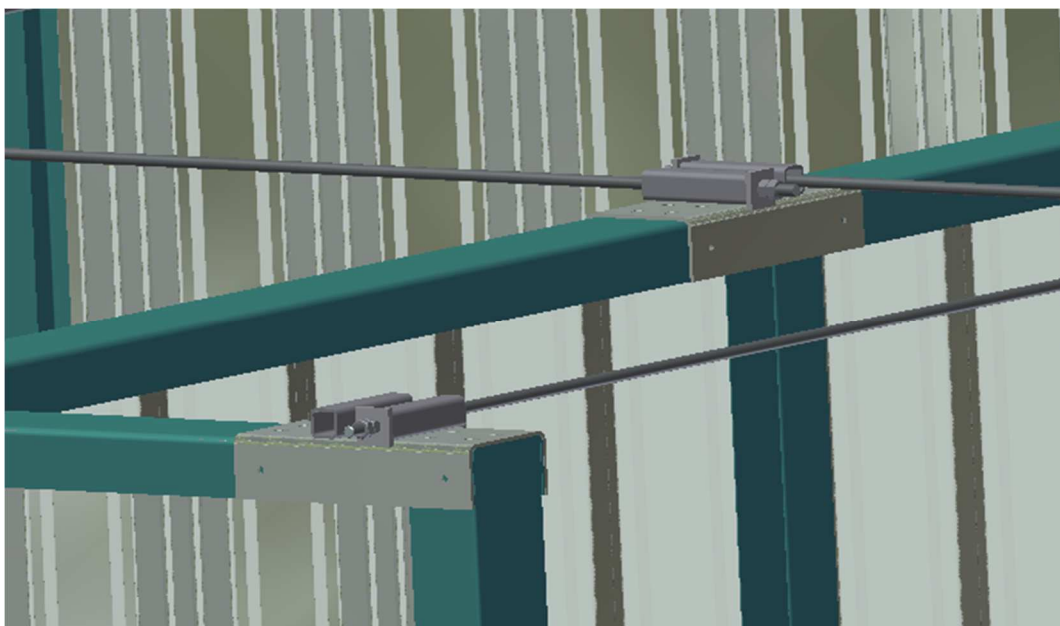


## Dimensions:

### With tension

- Suspended modular wall- height until 4m : Modules width 2,0 / 1,1m
- Suspended modular wall - height until 5m : Modules width 2,4 / 1,65 / 0,9m


### Without tension

- Free standing modular walls : height until 3m

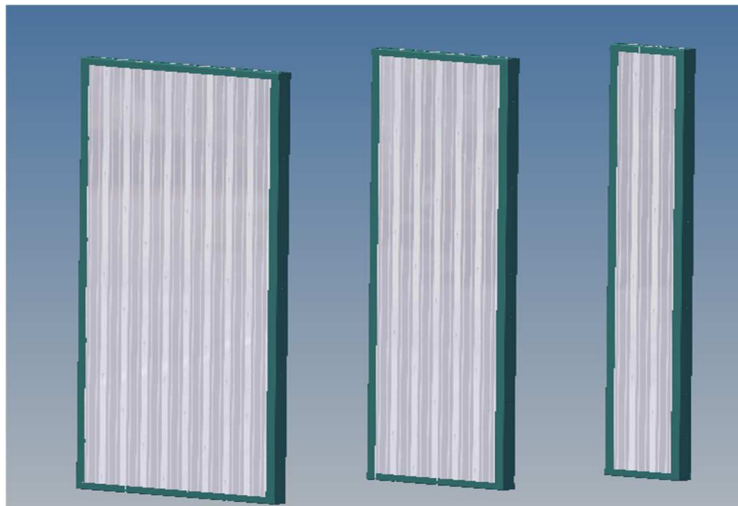

Modules width 2400 mm, 1650 mm, 900 mm



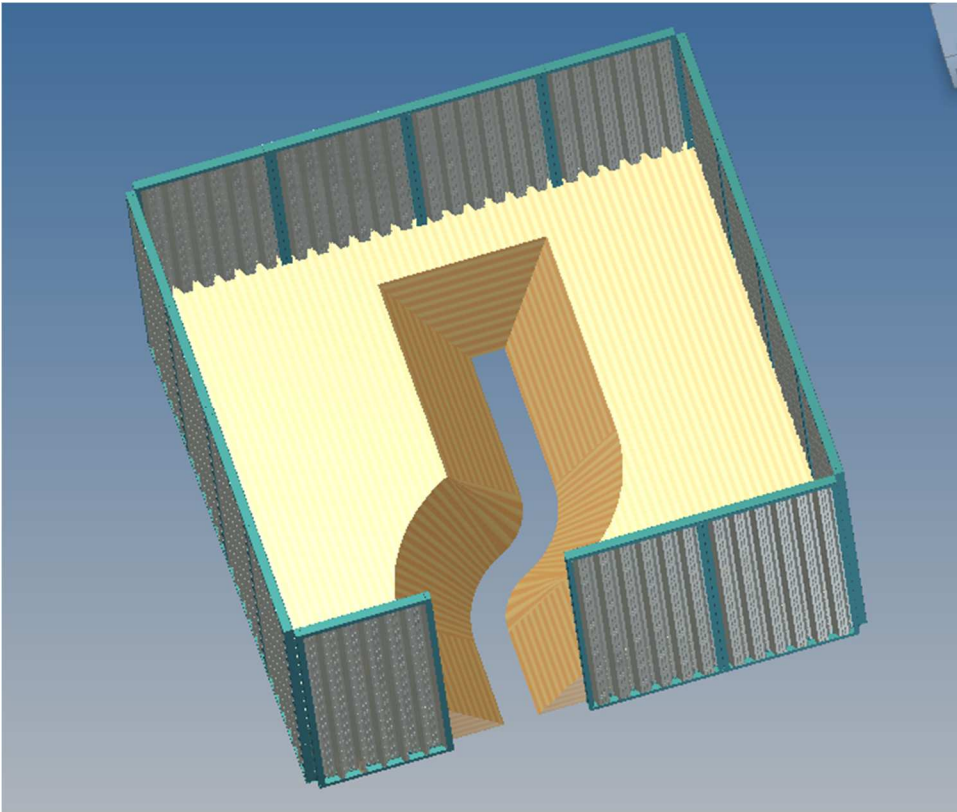

## Storing:

- Dry cereals or cereals to be dried
- Density : Max 750 kg/m<sup>3</sup>

## Transport:

- easy (using wooden pallets)

## Option:

- Plank bulkhead door
- Swing gates with removable discharge segments
- Ventilation system or drying system for the storage

---

For any further information, please visit our website :

[Homepage - Schmelzer \(a-schmelzer.com\)](http://a-schmelzer.com)

Tel: +49 (0)9231/9792-0

zentrale@a-schmelzer.de