

Grain conditioner ZZ120



Description

- Cleaning performances range of our ZZeparator : 20 to 120t/h depending on the version.
- Regulation by valve

Parts list :

- Cyclone
- 1 throttle valve
- 1 ZZeparator
- All cleaners: 3 phase current / 400 V / 50 Hz
- Noise emissions as A-weighted sound power level: 101.4 dB (A)

What material would you like to clean ?

Cereal grain : wheat, rye, barley, oats, maize

In addition, it is designed for cleaning of seeds, rice and plastic granules.

6 different sizes are available :

	t/h	Article	Power	Air Flow m ³ /h
ZZ20	20 t/h	4014028015699	2,2 kw	2400
ZZ40	40 t/h	4014028015704	2,2 kw	2900
ZZ60	60 t/h	4014028015690	5,5 kw	4800
ZZ80	80 t/h	4014028015691	7,5kw	6600
ZZ100	100 t/h	4014028015692	11 kw	8300
ZZ120	120 t/h	4014028015693	11 kw	9700

Grain conditioner ZZeparator with movable lower frame :




Cleaning base :

The cleaning technology is based on air speed. It gives an indication at which air speed a seed starts to hover. It is important to adjust the air speed on the cleaner, in order to avoid unwanted elements start to hover but the good not. An adjustment is possible via an optional valve.

Advantages:


- Easy assembly
- No risk of blockage
- High performance and exactly appropriate fan
- Low energy consumption

How is it working ?

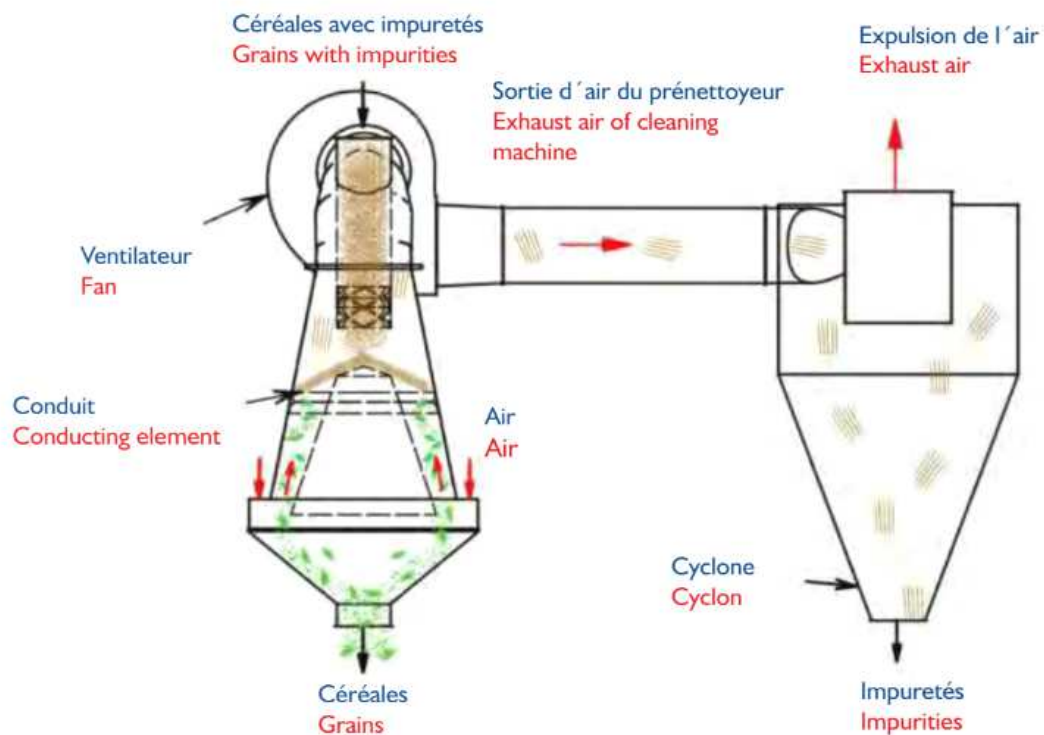

Dimensions and specifications :

Version ZZ 120-K with cyclone

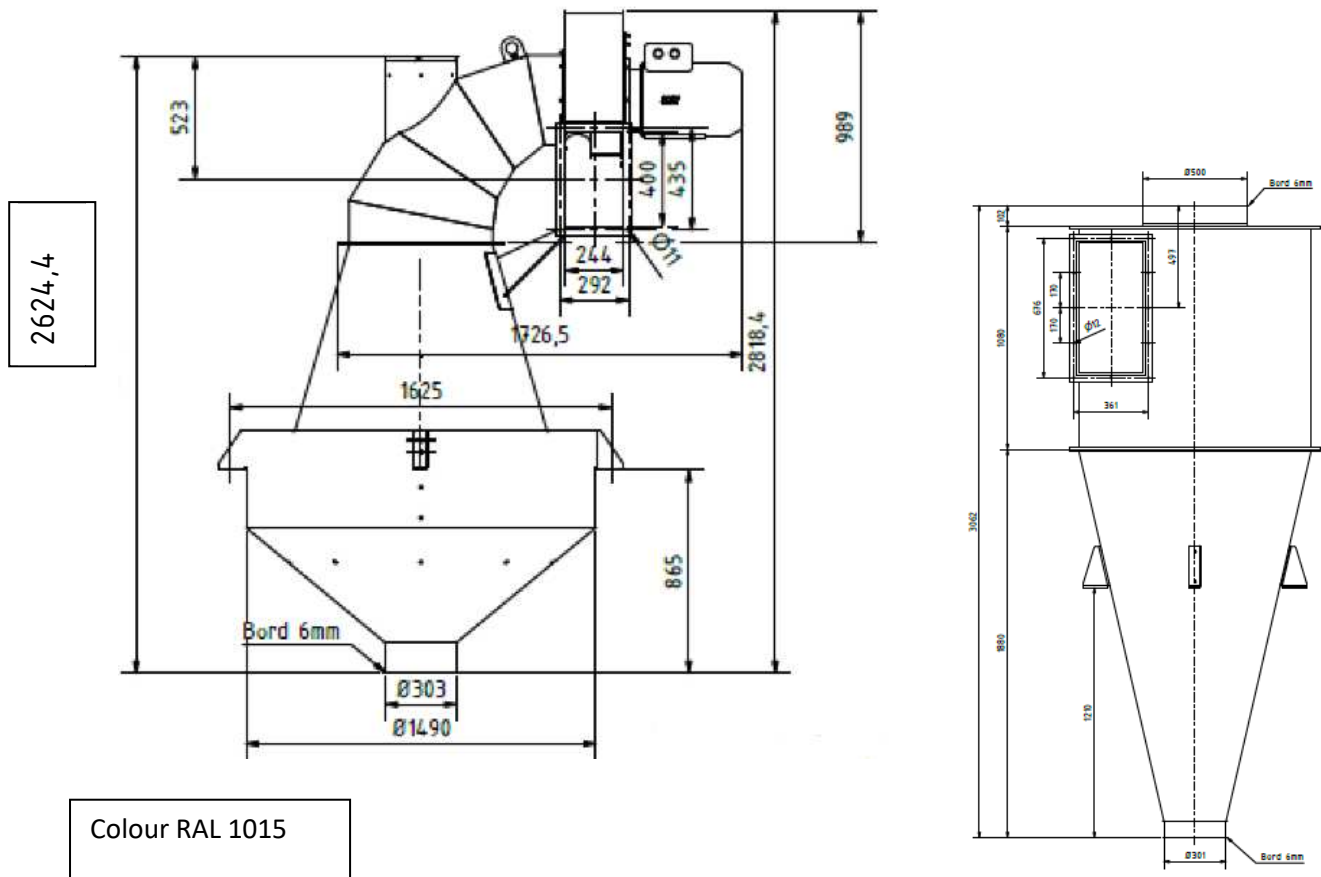

Options for ZZeparator:

- Frequency converter
- Steel frame
- Rain cap
- Filter for cyclones

For any further information, please visit our website:

[Homepage - Schmelzer \(a-schmelzer.com\)](http://a-schmelzer.com)

Tel: +49 (0)9231/9792-0

zentrale@a-schmelzer.de